



World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

DELUXE ABOVE GROUND ROLLER INSTALLATION GUIDE

A. Strap Kit

(Consists of 6x straps)



B. Winding Wheel



C. 2x Tube Ends



D. 12x Self tapping screws



E. Roller Ends



F. 3x Telescopic Tubes



G. Handle





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Instructions

Step 1: Remove the contents from the box



Step 2: Insert the roller ends into the two inner tubes provided. Fix with self-tapping screws.





World-First
Patented Technology



12 Year Pro Rata
Warranty




Tested
Independently





Australian
Designed & Made

Step 3: Place the shorter roller end through the wheel end. Screw the roller lock into the wheel end.

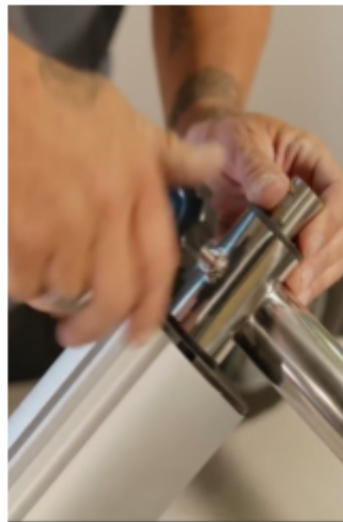

Step 4: Insert one plastic and two metal washers into the roller end. Then secure the turning handle with the longest nut and bolt provided.

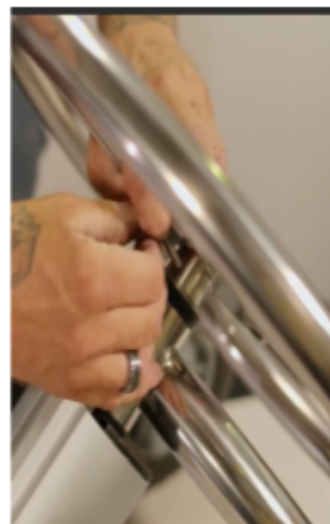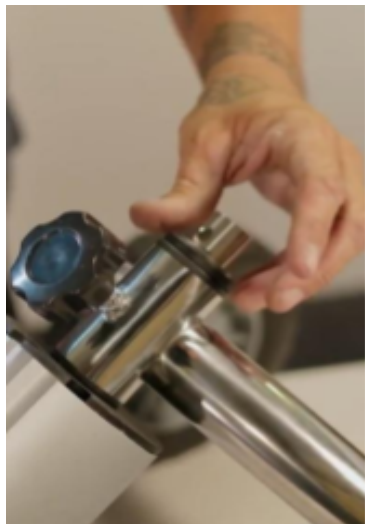



World-First
Patented Technology



12 Year Pro Rata
Warranty




Tested
Independently



Australian
Designed & Made

Step 5: Place the longer roller end through the remaining frame followed by one plastic and one metal washer.

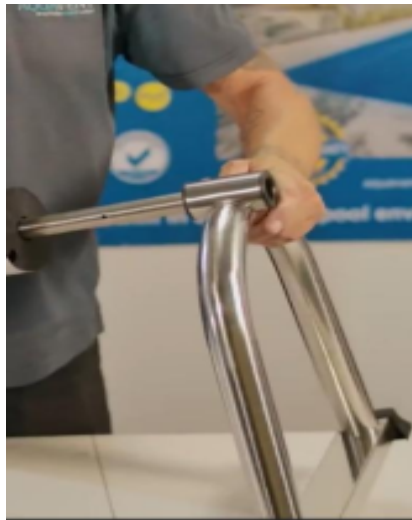

Step 6: Secure with remaining shorter nut and bolt.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 7: Push on the soft grip handle fitting nut and bolt into the groove.



Step 8: Insert assembled roller ends into the remaining tube. Adjust to suit the pool. Ensure a minimum of 450 millimeter is inside the center tube and secure tubes using the self-cutting screws provided.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made



Step 9: Feed the strap ends through the grooves on the tubes and space out evenly along the tube.





World-First
Patented Technology



12 Year Pro Rata
Warranty




Tested
Independently



Australian
Designed & Made

Step 10: Unscrew the clips

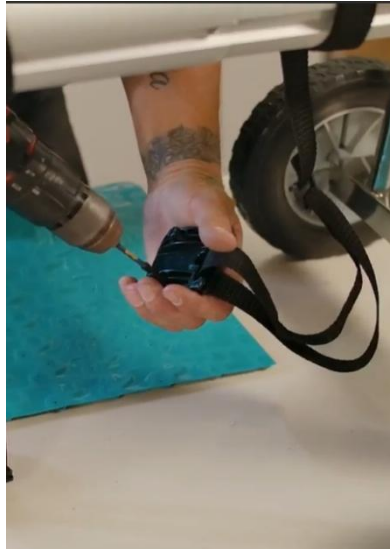

Step 11: Place them under and over the blanket. Once lined up, push a screwdriver through to make holes in the blanket. Tighten the screws back into place. Be sure not to over-tighten them as this may damage the screws. Repeat this with the rest of the clips.

Please note that you will need between 4 to 6 straps evenly spaced depending on the width of your pool.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Completed:

