



World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

STANDARD ABOVE GROUND ROLLER INSTALLATION GUIDE

A. Strap Kit

(Consists of 6x straps)



B. 2 x Roller Wheels



C. 2x Tube Ends



D. 12x Self tapping screws



E. Winding Wheel



F. 2x Roller Ends



G. 3x Telescopic Tubes



H. Roller lock and Handle





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Instructions

Step 1: Remove the contents from the box



Step 2: Insert the roller ends into the two inner tubes provided. Fix with self-tapping screws.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 3: Screw the roller lock into the wheel end of the roller, leaving space for the roller end to fit through. Position the wheel over the spindles, then place the locking washer on top.



Step 4: Using the tool provided, push down into the spindle to lock the wheels.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 5: Push the black covers to hide the spindles



Step 6: Place the handle through the hole in the wheel. Then take the locking metal cap and secure the end of the handle.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 7: Use the opposite end of the tool previously used to lock the cap into place.



Step 8: Place the shorter roller end through the wheel end.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 9: Position the turning handle over the spindle. Locate the holes and lock on using the longer of the two nuts and bolts provided.



Step 10: Place the longer roller end through the remaining frame and line up the holes as before and secure them with the remaining shorter nut and bolt.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 11 : Push on the soft grip handle, fitting nut and bolt into the groove





World-First
Patented Technology



12 Year Pro Rata
Warranty




Tested
Independently



Australian
Designed & Made

Step 12 : Insert the assembled roller ends into the remaining tube and adjust to suit the pool. Ensure a minimum of 450 mm is inside the center tube. Secure the tubes using the self-cutting screws provided.

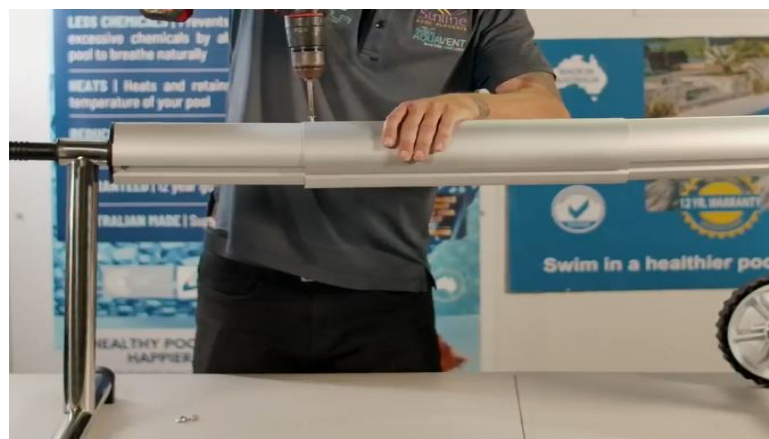



World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Step 11: Feed the strap ends through the grooves on the tubes and space out evenly along the tube.



Step 12: Unscrew the clips





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Place them under and over the blanket. Once lined up. Push a screwdriver through to make holes in the blanket.



Tighten the screws back into place. Be sure not to over tighten them as this may damage the screws. Repeat this with the rest of the clips. Please note you will need between 4 to 6 straps evenly spaced depending on the width of your pool.





World-First
Patented Technology



12 Year Pro Rata
Warranty



Tested
Independently



Australian
Designed & Made

Completed:

